# Save Space • Save Energy • Reduce Fire Hazard

# **Protect Transition Duct**



Today, you can place the dryer flush against the wall without crushing the exhaust hose or restricting airflow.

Install the Dryerbox® for more spacious, more efficient and safer homes.

- Eliminate One Elbow
- Gain 6' of Allowable Duct Run
- Reduce Call Backs

**Protect Transition Hose** 



Model 480 — 22 Gauge Aluminized Steel Shown Painted

Unprotected Hose is a Fire Hazard



Trottoot Translation Trotto
Neatly in the Wall
NEW
Model 480

Direction	Wall	Model
Both	2x6	DB-480
Upward	2x6	DB-425
Upward	2x4	DB-350
Downward	2x6	DB-4D
Downward	2×4	DR-3D

3D



## **Finish the Laundry Right**


Protecting flex hose lessens the risk of lint buildup, provides energy savings by removing the kinks usually found in the exhaust hose, and makes for a simpler, more professional looking finish.


(800) 707-6297 www.InfraAir.ca





# **Technical Product Specifications**

# Top Panel View | 4 % fis" wide | 3 % deep | 5 % | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½ | 4 ½

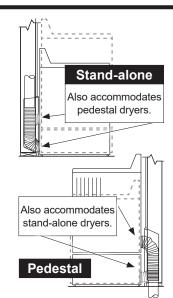

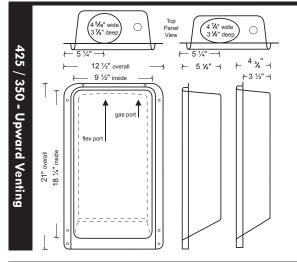



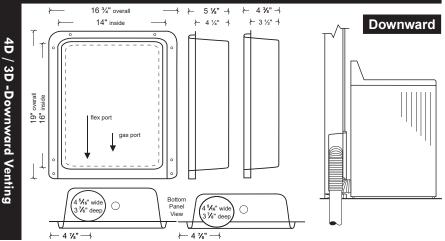

Model Number	Wall Size	Exhaust Direction
480	2X6	Up & Down
425	2X6	Upward
350	2X4	Upward
4D	2X6	Downward
3D	2X4	Downward

### Performance Data

### For Use:

- Dryer vent hose receptacle
- Doubles as gas connection receptacle
- Meets code requirements as a clean-out

### Materials:

- Model 480, 425 and 350 deep drawn with .028 aluminized steel (22 gauge)
- Model 4D and 3D deep drawn with .031 aluminized steel (22 gauge)
- UL Classified for a one hour wall (480 pending)



Cabinets

For Use in Penetration Firestop Systems See UL Directory of Products Certified for Canada and UL Fire Resistance Directory <25XC>

US Patents 5,476,183, 6,419,102 and 7,731,045

### General Information

### Benefits:

- Locate the dryer right up against the wall
- Flex is protected from getting crushed
- Lint build-up is minimized
- Efficiency is increased...clothes dry faster
- Dryer related service calls are almost eliminated
- Laundry room appears larger to prospects
- Reduces the fire hazard
- Reduces mold potential in the wall

### Features:

- No trim-ring piece is needed
- Elbow eliminator...gain 5 foot of duct run
- Surface is paintable, no masking needed
- Applauded by Mechanical Inspectors
- Convenient Duct Support Tab

### **Distributed By**

### **InfraAir Products**

40 Ironside Cres., Unit 2 Toronto, ON M1X 1G4 Canada Phone: (800) 707-6297

www.Infraair.ca