## Save Space • Save Energy • Reduce Fire Hazard

# **Protect Transition Duct**



Today, you can place the dryer flush against the wall without crushing the exhaust hose or restricting airflow.

Install the Dryerbox for more spacious,

more efficient and safer homes.

Eliminate one elbow

- Gain 6' of allowable duct run
- Dryer-related service calls are reduced
- Protect transition hose neatly in the wall





Unprotected Hose is a Fire Hazard





<b>Exhaust Direction</b>	Wall Size	Model Number
Both	2x6	DB-480
Upward	2x6	DB-425
Upward	2x4	DB-350
Downward	2x6	DB-4D
Downward	2x4	DB-3D

### **Finish the Laundry Right**


Protecting flex hose lessens the risk of lint buildup, provides energy savings by removing the kinks usually found in the exhaust hose, and makes for a simpler, more professional looking finish.





(800) 707-6297 InfraAir.ca





## **Technical Product Specifications**









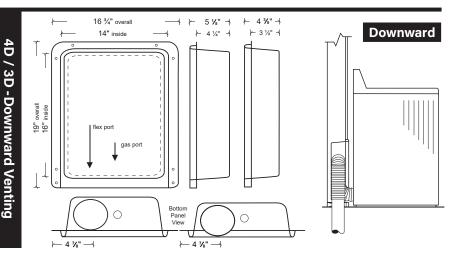

Model Wall **Exhaust Number** Size Direction 480 2X6 Up & Down Upward 425 2X6 Upward 350 2X4 Downward 4D 2X6 3D 2X4 Downward

#### **Performance Data**

#### For Use:

- Dryer vent hose receptacle
- Doubles as gas connection receptacle
- Meets code requirements as a clean-out

#### Materials:

- Model 480, 425 and 350 deep drawn with .028 aluminized steel (22 gauge)
- Model 4D and 3D deep drawn with .031 aluminized steel (22 gauge)
- UL Classified for use in a one hour wall assembly (UL System # W-L-7129)



For Use in Penetration Firestop Systems
See UL Directory of Products Certified for
Canada and UL Fire Resistance Directory
<25XC>

#### **General Information**

#### Benefits

- Locate the dryer right up against the wall
- Flex is protected from getting crushed
- Lint build-up is minimized
- Efficiency is increased...clothes dry faster
- Laundry room appears larger to prospects
- Reduces the fire hazard
- Reduces mold potential in the wall

#### Features

- No trim-ring piece is needed
- Elbow eliminator...gain 5 foot of duct run
- Surface is paintable, no masking needed
- Convenient Duct Support Tab

#### **Distributed By**

### **InfraAir Products**

40 Ironside Cres., Unit 2 Toronto, ON M1X 1G4 Canada Phone: (800) 707-6297

• •

InfraAir.ca

425 / 350 - Upward Venting